



# SERIE SS-PBT

*PBT Bandage  
Elasticizing Production Line*



The production line is composed of humidifying system, hot air drying system and bandage coreless winding system, suitable for make many types of elastic bandage.

Copyright by LOYAL. This brochure contains photos and technical data for information only, without contractual engagement. LOYAL reserves the right to introduce any modifications in the design and/or equipment.



**WUHAN LOYAL MACHINERY CO., LTD**

© 5B05, Decheng Center (DECH CENTER), Zhongbei Road No. 124,  
Wuchang District, 430061, Wuhan City, Hubei Province, China  
Mobile: 0086 1387 1887 978 (WhatsApp / Wechat) Tel / Fax: 0086 27 8566 3380  
E-mail: loyal@med-machinery.cn michelle\_6237@hotmail.com  
www.med-machinery.cn



# SERIE SS-PBT

*PBT Bandage  
Elasticizing Production Line*

## TECHNICAL SPECIFICATIONS



Servo-motors drive system controls the uniformity of the bandage elasticity and stretching ratio effectively.

The winding system has double output tracks, each winding track width is 22.5cm which can make 2 lanes of 10cm width bandage winding at same time.



Steam heating system can do customized as electricity heating or vapor heating.

It will adding elasticity by crinkling to bandage material with chemical fiber warp and woven edge.

Copyright by LOYAL. This brochure contains photos and technical data for information only, without contractual engagement. LOYAL reserves the right to introduce any modifications in the design and/or equipment.




**WUHAN LOYAL MACHINERY CO., LTD**

© 5B05, Decheng Center (DECH CENTER), Zhongbei Road No. 124,  
Wuchang District, 430061, Wuhan City, Hubei Province, China  
Mobile: 0086 1387 1887 978 (WhatsApp / Wechat) Tel / Fax: 0086 27 8566 3380  
E-mail: loyal@med-machinery.cn michelle\_6237@hotmail.com  
www.med-machinery.cn



# SERIE SS-PBT

*PBT Bandage  
Elasticizing Production Line*

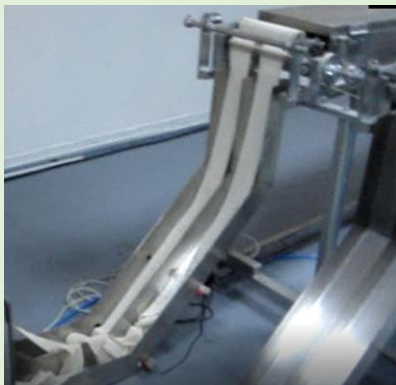

PLC control system made the whole production line continuedly running.

Left picture showing the elasticizing system made material store for winding system by PLC control.

Operating, technical parameter setting and management by touch screen, convenient for operators and workshop manager daily work.



## Technical Parameter

Production speed	20-40 m/min
Elasticizing mode	Steam or electrical
Overall dimension	4600x1240x1700mm
Weight	1500kg

Copyright by LOYAL. This brochure contains photos and technical data for information only, without contractual engagement. LOYAL reserves the right to introduce any modifications in the design and/or equipment.



**WUHAN LOYAL MACHINERY CO., LTD**

© 5B05, Decheng Center (DECH CENTER), Zhongbei Road No. 124,  
Wuchang District, 430061, Wuhan City, Hubei Province, China  
Mobile: 0086 1387 1887 978 (WhatsApp / Wechat) Tel / Fax: 0086 27 8566 3380  
E-mail: loyal@med-machinery.cn michelle\_6237@hotmail.com  
www.med-machinery.cn